
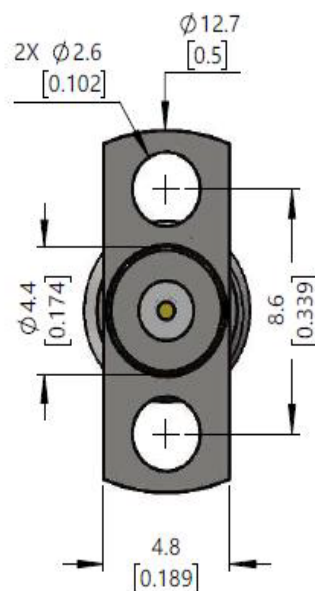


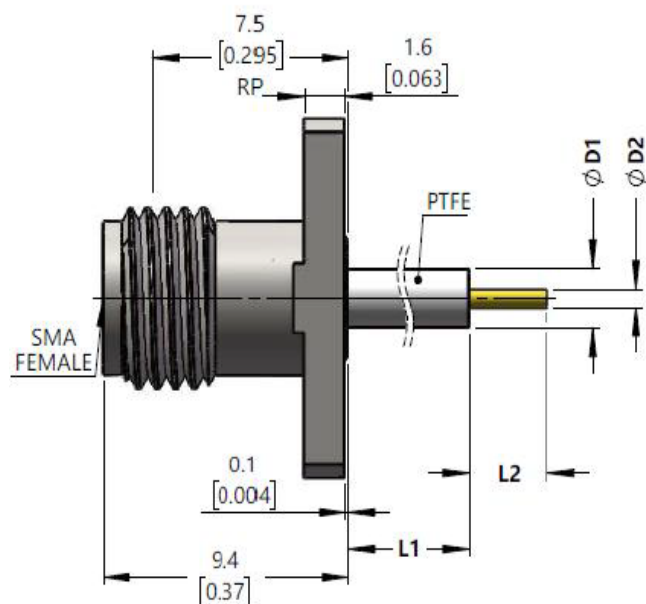

Electrical & Environmental Characteristics

Impedance	50 Ω
Insulation Resistance	5000 M Ω
Operating Frequency	DC~26.5GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤ 1.15
Insertion Loss	$\leq 0.05 * \text{Sqrt}(f_GHz)$
Operating Temperature	- 55~+165 $^{\circ}\text{C}$

Material & Coat-Plating

Inner Conductor	Beryllium Copper, Gold
Dielectric	PTFE
Body	Stainless Steel, Passivated
Coupling Nut	NA

No.	Model	D1(Diameter1)	D2(Diameter2)	L1(Length1)	L2(Length2)
1	SMA-KFD60701	2.2 [0.087]	0.30 [0.012]	3.2 [0.126]	1.27 [0.050]
2	SMA-KFD60702	3.9 [0.154]	0.64 [0.025]	15 [0.590]	3 [0.118]
3	SMA-KFD60703	2.1 [0.083]	0.64 [0.025]	15 [0.590]	3 [0.118]
4	SMA-KFD60742	2.2 [0.087]	0.30 [0.012]	4.3 [0.169]	1.3 [0.051]
5	SMA-KFD60706	2.2 [0.087]	0.30 [0.012]	3 [0.118]	1.27 [0.050]
6	SMA-KFD60739	2.1 [0.083]	0.64 [0.025]	10 [0.394]	3 [0.118]
7	SMA-KFD60708	2.1 [0.083]	0.64 [0.025]	6.5 [0.256]	3 [0.118]
8	SMA-KFD60700	2.1 [0.083]	0.64 [0.025]	8.1 [0.319]	-

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	Product Model SMA-KFD60708 SMA Female Flange Connector			
	0 PLC ± 0.25 1 PLC ± 0.15 2 PLC ± 0.12 3 PLC $\pm$ 3 PLC $\pm$ ANGLES $\pm 1^{\circ}$	PRODUCT SPEC				
		APPLICATON SPEC	SIZE A4	GAGE CODE 0T8L4	DRAWING NO	
MATEIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	CUSTOMER DRAWING		SHEET1 OF 1	RVE 1