

Power Amplifier

18-40GHz /45dB Gain/40 dBm Psat

Model: TLPA18G40G-45-40

TLPA18G40G-45-40 is a power amplifier with power gain of 45 dB and a nominal Psat of 40 dBm across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +18 VDC/5 A. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Ultra Wide Band: 18-40GHz
- Gain: 45dB Typ
- Output Power Psat: 40dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18-40			GHz
功率增益 Power Gain	40	45		dB
增益平坦度 Gain Flatness		±4	±5	dB
线性输出功率 Output P1dB		32		dB
饱和输出功率 Output Psat	37	40		dBm
杂散 Spurious		-60		dBc
谐波 Harmonics		-20		dBc
输入驻波 Input VSWR		2		:1
直流电压 DC Voltage		18		V DC
直流电流 DC Supply Current		5		A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92 Female/2.92 Female	
直流供电接口 DC Supply Connector	Solder Pin	
尺寸 Size	90*120*18(Without Heatsink) 132*165*67.5(With Heatsink)	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+20V
输入功率 RF Input Power	0dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

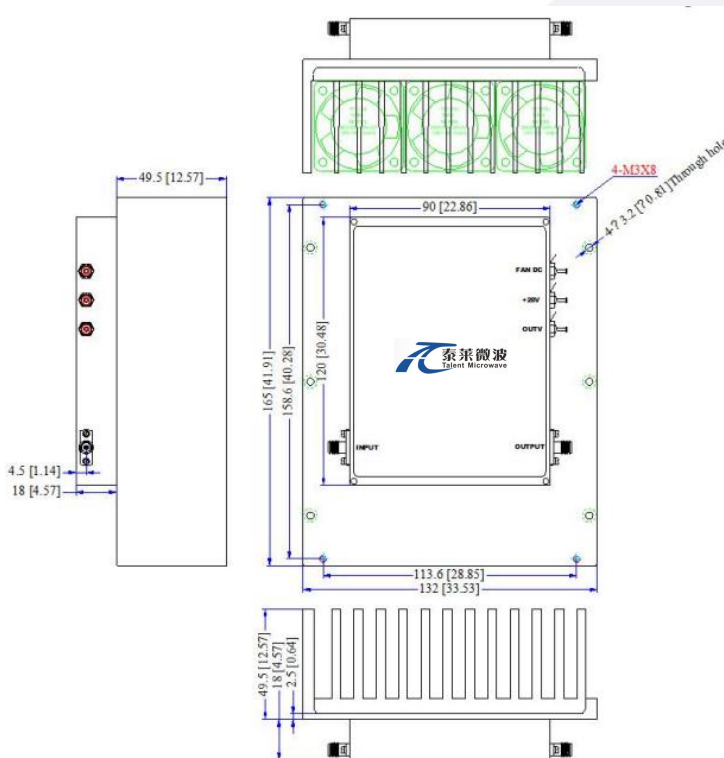

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+50	°C
存储温度 Non-operating Temperature*	-50		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA18G40G-45-40	Power amplifier 18-40GHz, Gain:45dB, Psat:40dBm, +18V DC, Without Heatsink	Rev.1.1
TLPA18G40G-45-40-HS	Power amplifier 18-40GHz, Gain:45dB, Psat:40dBm, +18V DC, With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

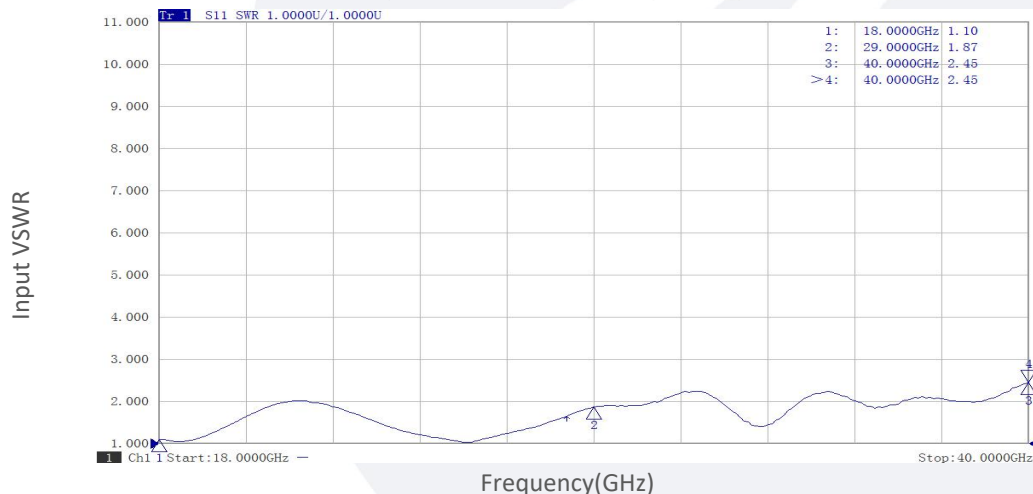


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

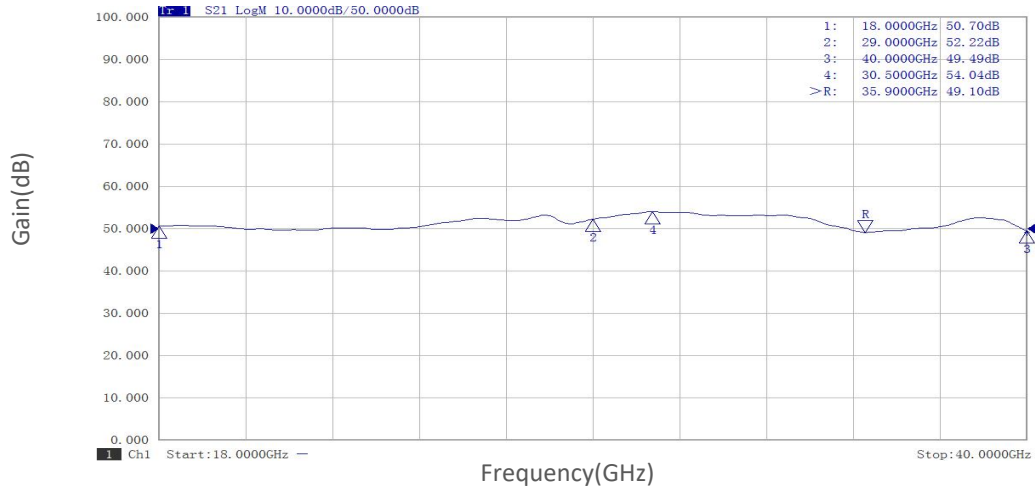

PndB vs Frequency

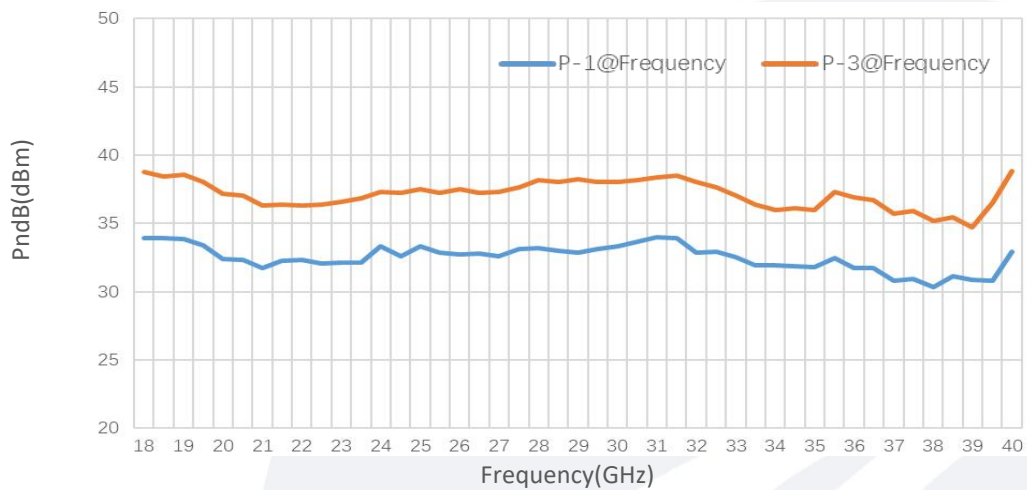


Pout@Pin

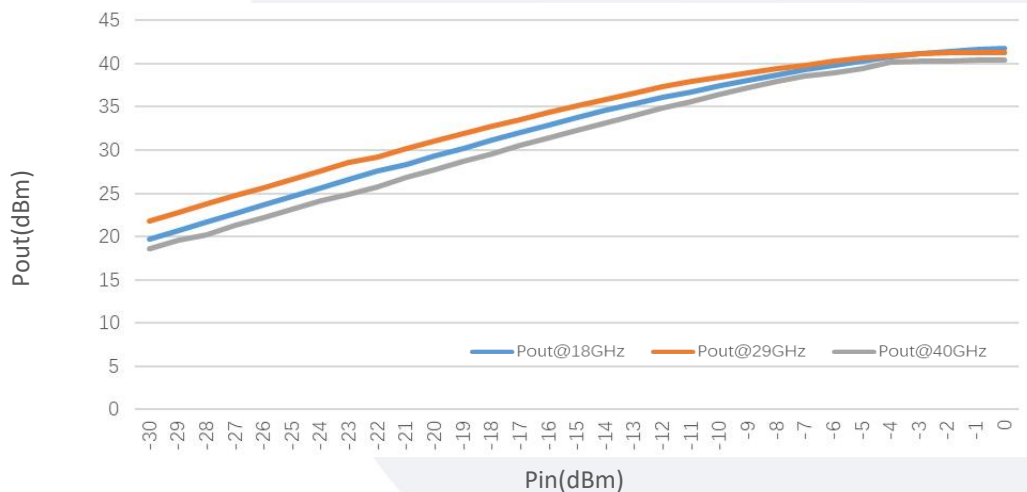


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Pout@Equal_Pin

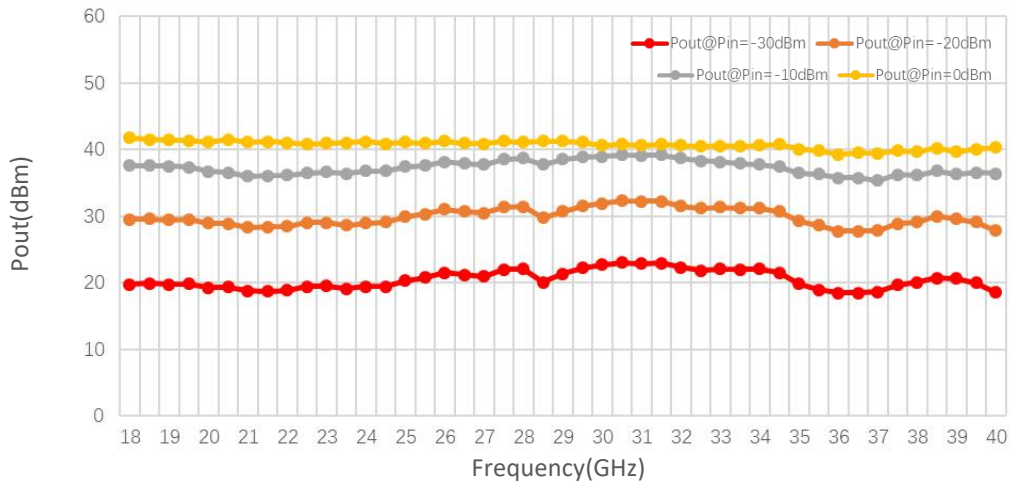

Spurious vs Frequency

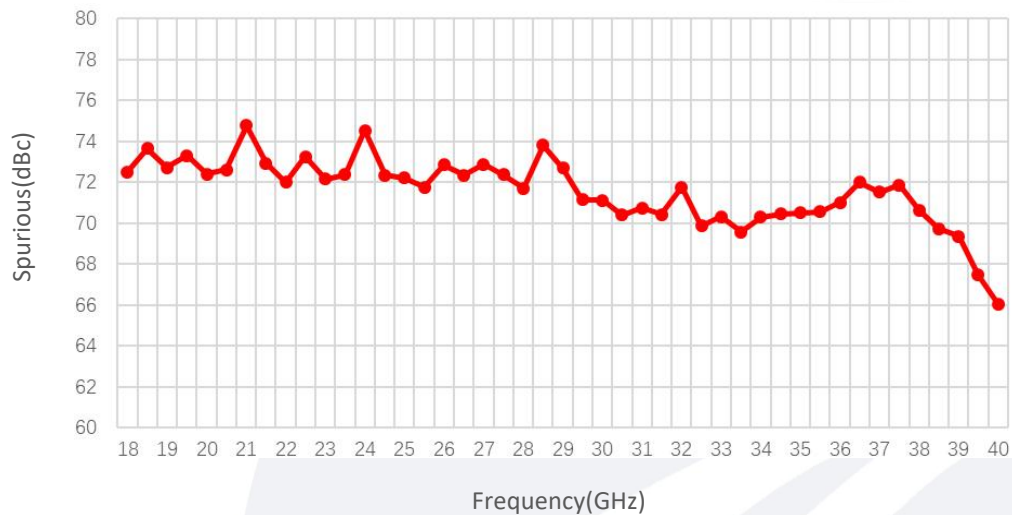

Harmonic vs Frequency

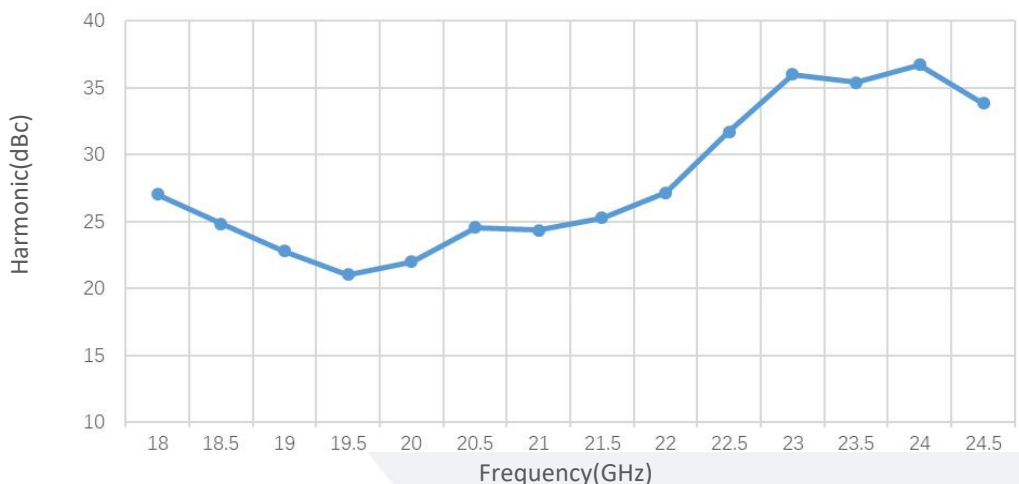

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.